

## 1/4HP POOL COVER PUMP

# WHPCP

The Westinghouse 1/4HP Pool cover pump is a dynamic and versatile pump designed to remove water from pool covers, hot tubs, basements, or any standing water. It is constructed with corrosion-resistant reinforced thermoplastic for a long life, and its energy efficient Westinghouse motor helps it to move large amounts of water quickly and quietly. The 25' cord and detachable base allow you to use it for any job around your home.

### System Includes

- Anti-Airlock Garden Hose Connector Valve
- 1/4 HP Pump
- 25' pull rope
- Detachable base

### Features and Benefits

- Anti-Airlock Vent
- 360-degree movement for total coverage
- Automatic shut-off
- 1/4 HP Westinghouse PSC Motor
- 25 Foot cord

**1 Detachable base** allows for dynamic multi use applications.

**2 Durable Reinforced Thermoplastic** housing allows the pump to have a long corrosion free life expectancy.


**3 Plastic Ball Bearing Wheels** help the pump move in a complete 360-degree range.

**4 Water-Cooled Motor** allows you to use in your home, around fish or plants worry free.

**5 Automatic operation** when the **Electronic Probe Sensor** detects water. It will cycle for 60 seconds after the switch is deactivated.



Application	
Automatic Pool cover Pump for general water transfer	
Voltage	115
Hertz	60
Phase	Single
Rpm	3450RPM
Motor Type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit Requirements	15 AMP
Duty Rating	Continuous*
Shaft Seal	Lip seal
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Water cooled
Motor Protection	Auto reset thermal overload protector
Pump Specifications	
Discharge Size	1" MNPT & garden hose adapter included
Cord Length	25'
Cord Type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller Material	Rubber
Diffuser Description	Funnel shape double-flow channel diffuser design
Gasket	Rubber
Solids Handling	1/8" spherical
Liquid Temp. Range	32°-95°F
Operation	Automatic
Maximum Flow Rate	30 GPM
Maximum Head	28 ft
Maximum Pressure	12 psi

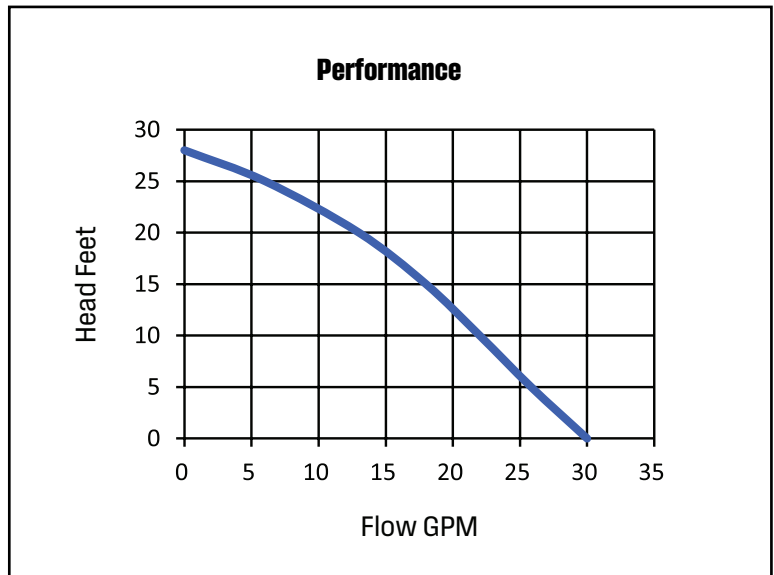

Model	HP	Amps	Discharge Height (ft)	0	5	10	15	20	25	28
WHPCP	1/4	2A	GPM	30	26	22	18	13	6	0
			GPH	1800	1550	1320	1080	780	360	0

